


附表

尺寸图


产品参数 Product Parameters	单位Unit	HY10
外形尺寸 Overall Dimensions		
a 总长 Overall length	mm	2950
b 总宽 Overall width	mm	930
c 总高 Overall height	mm	2285
d 转台宽度 Width of platform	mm	890
e 履带长度 Length of crawler	mm	1200
f 尾部最小回转半径 Minimum tail swing radius	mm	890
g 履带宽度 Width of crawler	mm	180
h 履带轴距 Track gauge	mm	915
i 轨距 Track gauge	mm	745
j 配重离地间隙 Counterweight clearance	mm	405
k 最低离地间隙 Minimum ground clearance	mm	145
m 履带高度 Track height	mm	310
n1 动臂偏转距离右 Boom deflection distance (right)	mm	40°/300
n2 动臂偏转距离左 Boom deflection distance (left)	mm	53°/230

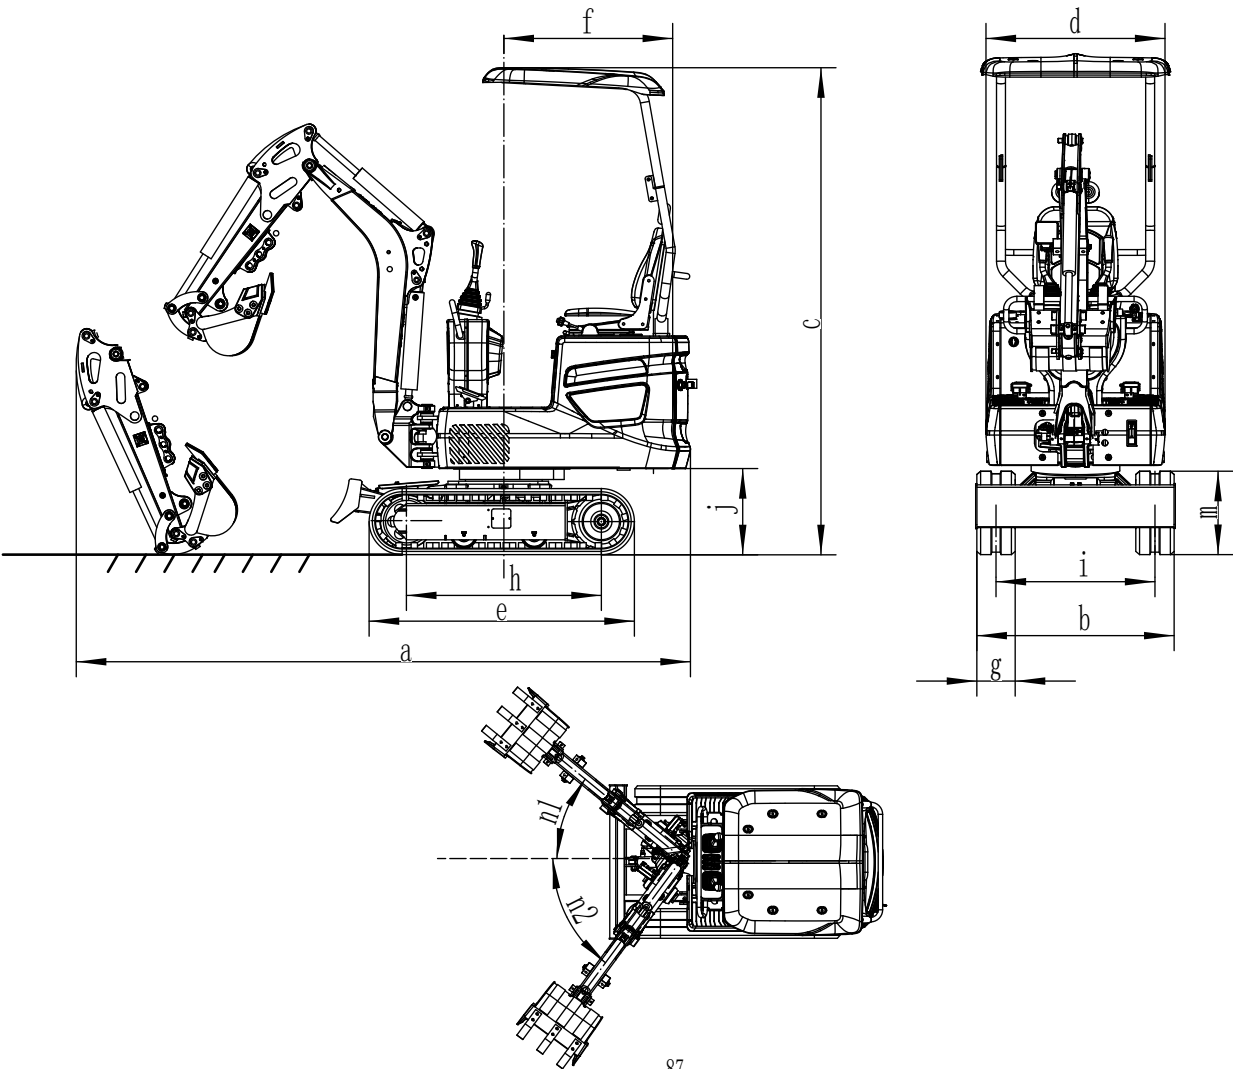

Appendix


Dimensional Drawing

产品参数 Product Parameters	单位Unit	HY10
外形尺寸 Overall Dimensions		
a 总长 Overall length	mm	2950
b 总宽 Overall width	mm	930
c 总高 Overall height	mm	2285
d 转台宽度 Width of platform	mm	890
e 履带长度 Length of crawler	mm	1200
f 尾部最小回转半径 Minimum tail swing radius	mm	890
g 履带宽度 Width of crawler	mm	180
h 履带轴距 Track gauge	mm	915
i 轨距 Track gauge	mm	745
j 配重离地间隙 Counterweight clearance	mm	405
k 最低离地间隙 Minimum ground clearance	mm	145
m 履带高度 Track height	mm	310
n1 动臂偏转距离右 Boom deflection distance (right)	mm	40°/300
n2 动臂偏转距离左 Boom deflection distance (left)	mm	53°/230

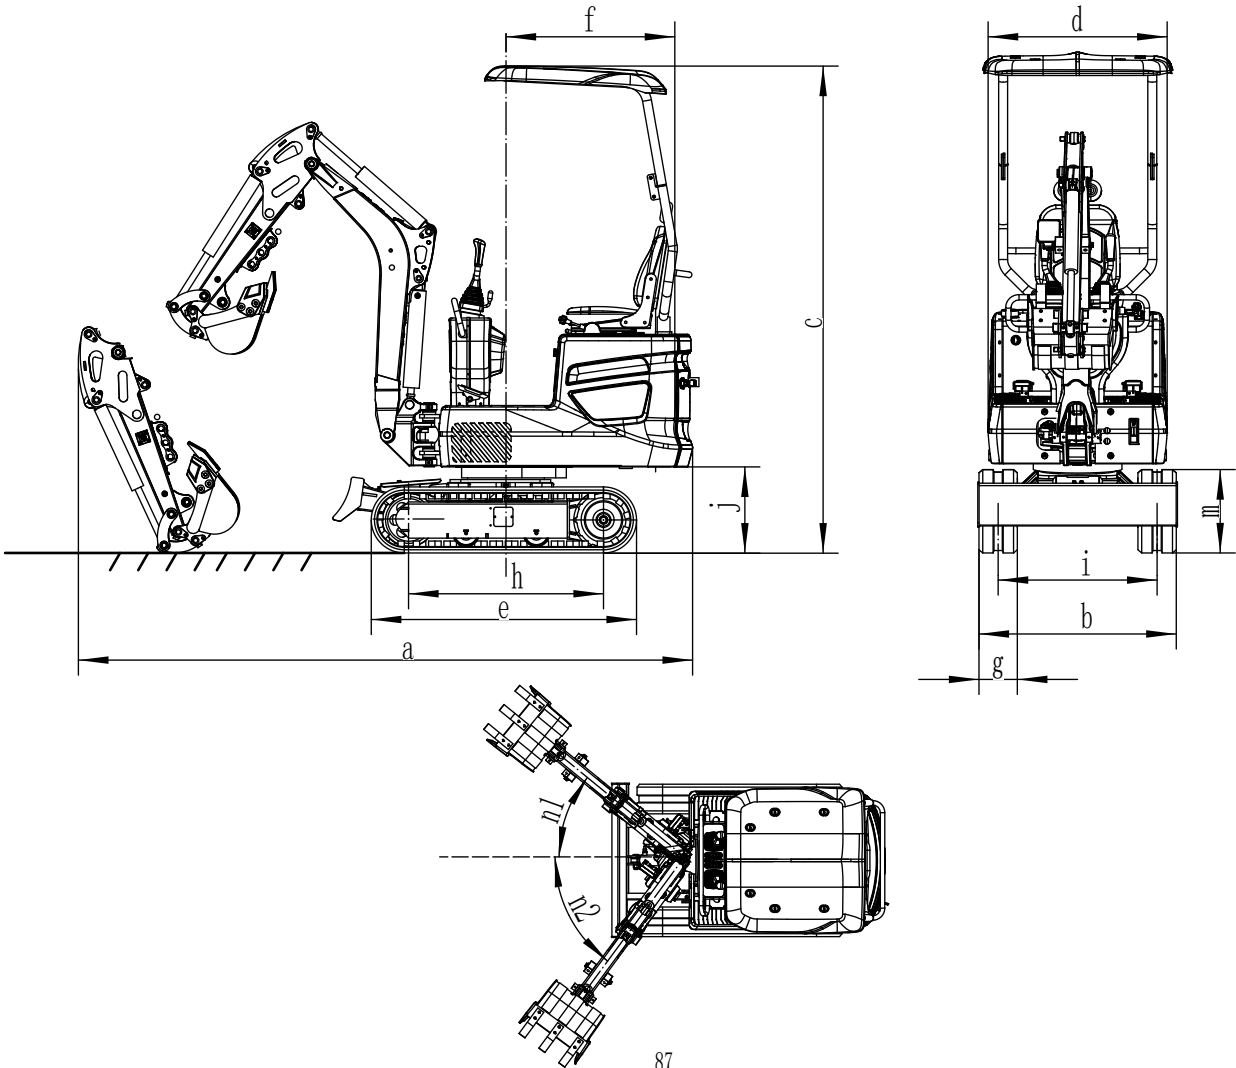


主要参数

产品参数 Product Parameters	单位Unit	HY10
工作范围 Working Range		
A 最大挖掘高度 A Maximum digging height	mm	2490
B 最大卸载高度 B Maximum dumping height	mm	1745
C 最大挖掘深度 C Maximum digging depth	mm	1725
D 最大垂直挖掘深度 D Maximum vertical wall digging depth	mm	1655
E 最大挖掘半径 E Maximum digging radius	mm	3030
F 最小回转半径 F Minimum swing radius	mm	1490
G 推土铲最大提升高度 Maximum Dozer Lifting Height	mm	170
H 推土铲最大掘地深度 Maximum Dozer Cutting Depth	mm	240

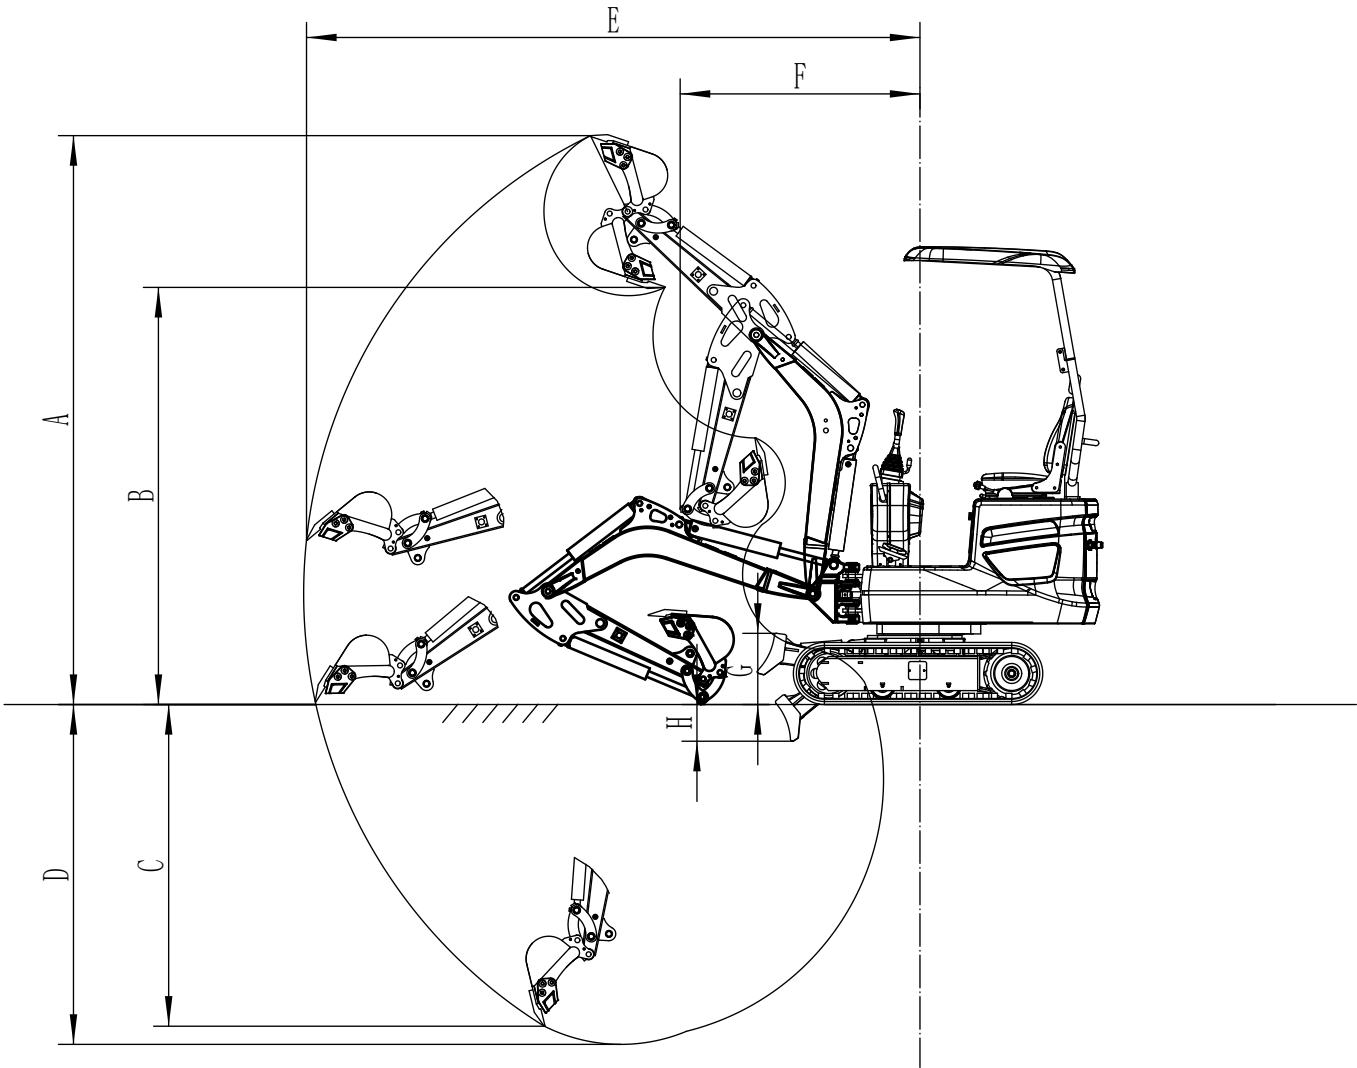

Main Parameters

产品参数 Product Parameters	单位Unit	HY10
工作范围 Working Range		
A 最大挖掘高度 A Maximum digging height	mm	2490
B 最大卸载高度 B Maximum dumping height	mm	1745
C 最大挖掘深度 C Maximum digging depth	mm	1725
D 最大垂直挖掘深度 D Maximum vertical wall digging depth	mm	1655
E 最大挖掘半径 E Maximum digging radius	mm	3030
F 最小回转半径 F Minimum swing radius	mm	1490
G 推土铲最大提升高度 Maximum Dozer Lifting Height	mm	170
H 推土铲最大掘地深度 Maximum Dozer Cutting Depth	mm	240

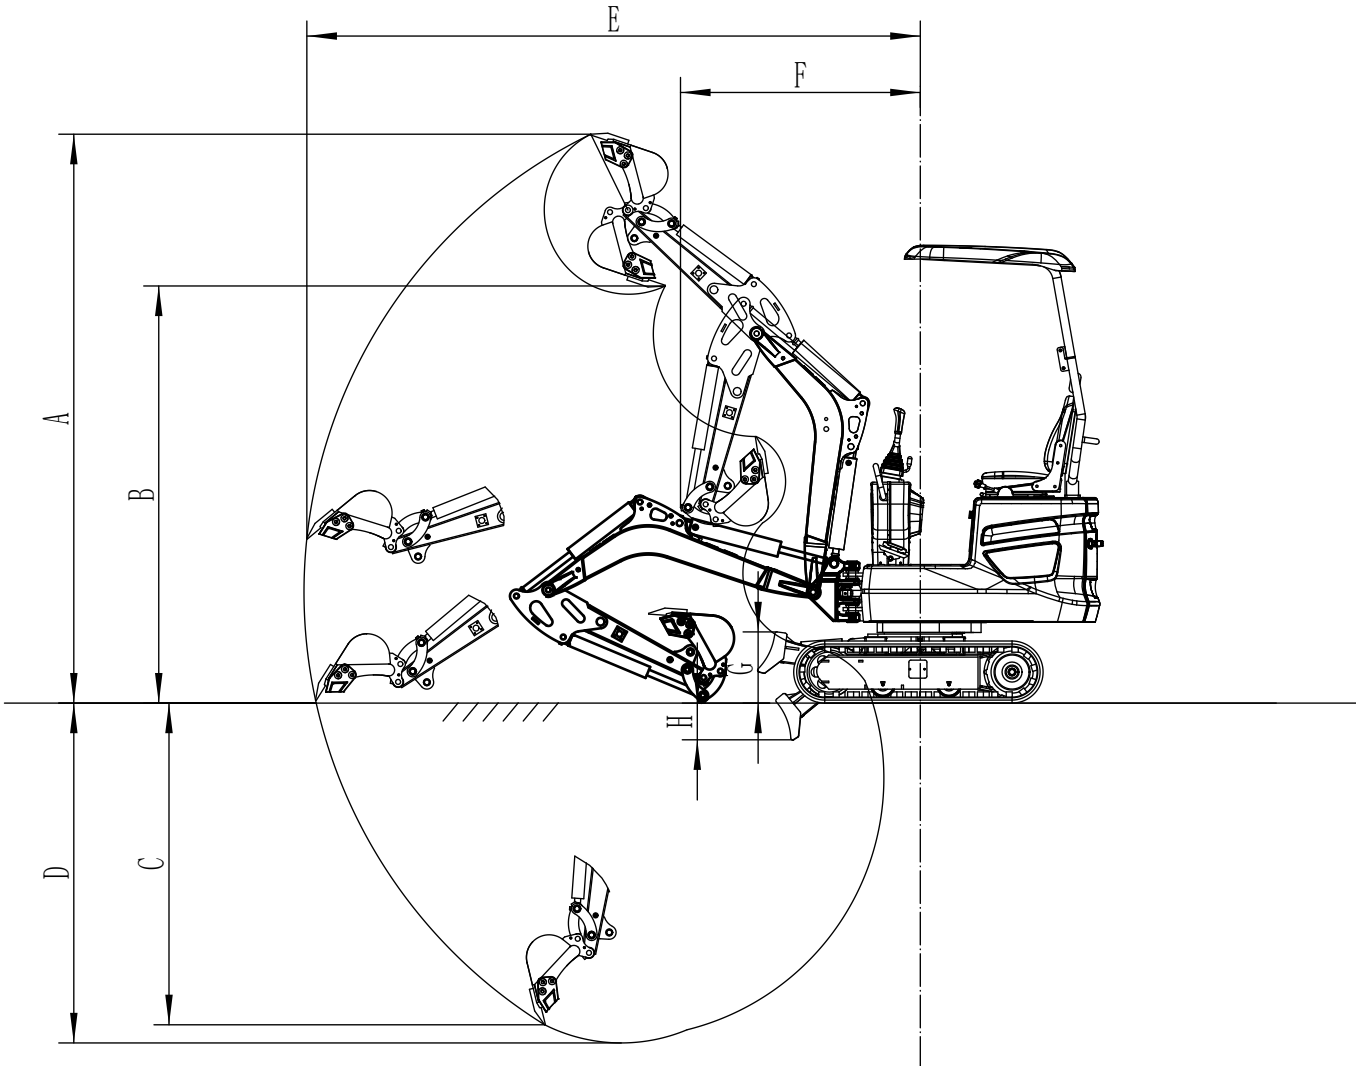

主要参数

HY10性能表			
	技术参数	单位	
操作重量		kg	1000
铲斗容量		m3	0.022
工作装置形式			反铲
发动机	型号		K00P192FA
	排量		0.499
	额定输出功率/转速	kw/r/min	7.6/3000
	最大扭矩	N.m/r/min	25/2500
速度	最大行驶速度	km/h	1.2
	回转速度	rpm	9
	最大爬坡能力		30°
	最大挖掘力	kN	6.5
尺寸	总长（运输）		2950
	总宽		930
	总高（顶棚带/不带）		2285（2030）
	推土铲	最大清理深度	240
		最大地面清理高度	170
履带部件	接地比压	kgf/cm2	0.4
	履带	材料	橡胶
	涨紧类型		机械
液压泵	形式		齿轮泵
液压各液体容量	工作压力	MPa	16
	流量	L/min	18
	液压油箱容量	L	18
	发动机油容量	L	1.65
	燃油箱容量	L	5.5